



OMAX[®]

A Hypertherm Associates Brand

OMAX 120X

JetMachining Center



The OMAX JetMachining Center[®] is designed for advanced facilities where the desire for performance and results are paramount. A production workhorse in any manufacturing environment, the OMAX JetMachining Center delivers high precision multi-axis parts quickly and consistently in almost any material, maximizing machining throughput. Our innovative IntelliMAX[®] software enables precise and lightning-quick responses to a variety of cutting situations. Long-life and hard-wearing materials reduce maintenance items to a minimum, boosting uptime and productivity to improve your bottom line.

EnduroMAX pump innovation


The EnduroMAX[®] pump is the advanced direct drive pump that delivers the most horsepower to the nozzle. With 1000 hours between maintenance cycles, the EnduroMAX is the best choice for reliable and robust ultra high pressure waterjet pumps.

IntelliMAX Software Advantages

For decades, we have invested in extensive research and development to provide the most advanced abrasive waterjet software possible. Through software enhancements, your OMAX JetMachining Center is capable of advanced 5-axis machining in virtually any material, from aluminum and steel to carbon fiber, titanium, copper, glass, composites, and more.

Standard model specifications

Standard model specifications	
Material support slats	4" x 1/8" (102 mm x 3.2 mm) galvanized steel
Maximum supported material load	400 lbs/sq ft (1,950 kg/sq meter)
Electrical requirements	3-Phase, 380-480 VAC ±10%, 50-60 Hz
Noise level	Below 80 dBA at one meter for submerged cutting
Speed	350 in/min (8.89 m/min)
Linear axis accuracy*	±0.001" (±0.025 mm)
Linear axis repeatability*	±0.001" (±0.025 mm)
Ballbar circularity*	±0.005" (±0.127 mm)

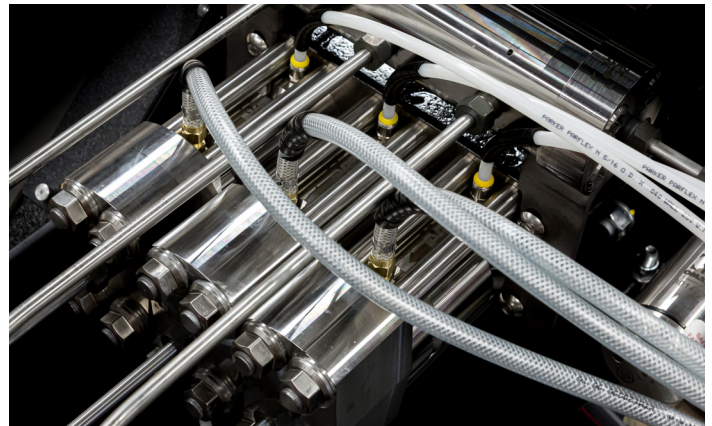

Model dimensions & envelope

Dimensions	120X/S	120X	120X-1	120X-2	120X-3
Footprint (standard layout)	26' 7" x 19' 5" (8.10 m x 5.92 m)	33' 3" x 19' 5" (10.13 m x 5.92 m)	37' 2" x 22' 5" (11.33 m x 6.83 m)	44' 1" x 22' 5" (13.44 m x 6.83 m)	51' 6" x 22' 5" (15.70 m x 6.83 m)
Weight (tank empty)	22,000 lbs (9,979 kg)	22,000 lbs (9,979 kg)	26,000 lbs (11,793 kg)	30,000 lbs (13,608 kg)	34,000 lbs (15,422 kg)
Height	14' 0" (4.27 m)	14' 0" (4.27 m)	14' 0" (4.27 m)	14' 0" (4.27 m)	14' 0" (4.27 m)
Operating weight	58,961 lbs (26,744 kg)	71,679 lbs (32,513 kg)	88,937 lbs (40,096 kg)	106,195 lbs (48,169 kg)	123,453 lbs (55,997 kg)
Envelope	120X/S	120X	120X-1	120X-2	120X-3
X-Y cutting travel*	13' 4" x 10' 0" (4.06 m x 3.04 m)	20' 0" x 10' 0" (6.09 m x 3.04 m)	26' 8" x 10' 0" (8.12 m x 3.04 m)	33' 4" x 10' 0" (10.16 m x 3.04 m)	40' 0" x 10' 0" (12.19 m x 3.04 m)
Motorized Z-Axis travel*	8" (203 mm)	8" (203 mm)	8" (203 mm)	8" (203 mm)	8" (203 mm)
Table size	14' 11" x 11' 5" (4.55 m x 3.48 m)	21' 0" x 11' 5" (6.40 m x 3.48 m)	28' 3" x 11' 5" (6.40 m x 3.48 m)	34' 11" x 11' 5" (10.64 m x 3.48 m)	41' 0" x 11' 5" (12.50 m x 3.48 m)

*Optional accessories may reduce cutting travel. Accuracy specifications are at 72° F (22° C).

Available accessories

- TiltJET® for advanced taper removal for perfectly square part edges
- Terrain Follower automatically adjusts to accommodate uneven part surfaces. Collision sensing capability is available with TiltJet and Programmable Z cutting heads.
- Rotary Axis for creating complex 3D parts and tube & pipe cutting

IntelliMAX Software Suite

The IntelliMAX Software Suite includes LAYOUT, a full-featured CAD design program; MAKE, the highly powerful machine controller software; IntelliVISOR®, the comprehensive system monitoring package; and much more.

- Ease of use: with LAYOUT, the user, whether a novice or an expert, can quickly and easily create a part file. With one click, that part file can be converted into a tool path that is ready for machining.
- Built-in intelligence: In MAKE, detailed reporting provides highly precise estimates on cut times, allowing for accurate job costing.
- Advanced monitoring: Included with the IntelliVISOR system monitoring application, the operator can set up detailed maintenance reminders that minimize downtime and maximize production. Advanced notification features send alerts to email or a smartphone, keeping the operator aware of the machine operation at all times.



World-class service, support and innovation for advanced abrasive waterjet systems

OMAX, part of Hypertherm Associates, sets the standard for service and support in the waterjet machine tool industry. It starts with a rigorous certification program at OMAX in Kent, Washington where OMAX direct and distributor technicians are trained to install, operate and maintain OMAX abrasive waterjet systems. OMAX engineers continue to innovate technology for abrasive waterjet machining, from proven 4th generation pump designs to cutting edge drive systems with micron-level accuracy. Customers have a number of contact options to suit their schedules and needs, including an extensive library of online resources. With the largest abrasive waterjet support network in the world, OMAX continues to shape the future of waterjets.

To see how an OMAX abrasive waterjet system can save you time and money, call or visit our website and request a free part analysis today.

As 100% Associate owners, we are all focused on delivering a superior customer experience. www.hyperthermassociates.com/ownership

Environmental stewardship is one of Hypertherm Associates' core values. www.hyperthermassociates.com/environment

100% Associate-owned



UL 508A, CAN/CSA C22.2 No. 14,
CAN/CSA C22.2 No. 73
ISO 9001:2015 Certified

For more information, visit: www.omax.com

Unless otherwise noted in the collateral, all trademarks are property of Hypertherm, Inc. and may be registered in the United States and/or other countries. All other trademarks are the properties of their respective owners.

Please visit www.omax.com/patents for more details about Hypertherm Associates patent numbers and types.

© 7/2025 Hypertherm, Inc. Revision 4
MKT041



**HYPERTHERM
ASSOCIATES™**